

TBL Methods to Deploy Projects to Servers


Page Contents

- 1 TopBraid Composer Export
- 2 Upload Project to Server
- 3 Send Projects between Servers
- 4 Appendix: Web Services For Deployment

TopBraid projects are workspace directories that contain multiple resources, such as asset collections, teamwork settings and working copies, and various configurations, etc. This section describes three methods for deploying projects to a TopBraid Suite server from three different project sources: (1) a TopBraid Composer IDE - Maestro Edition (TBC-ME), (2) a `.zip` file of a project (directory), or (3) another TopBraid server. The appendix also describes web services calls to create a new collection such as taxonomy or ontology and import a `.ttl` file into it.

TopBraid Composer Export

Developers can design and test semantic content and web applications using TBC-ME, and then deploy those projects to a TopBraid server. TBC-ME has a custom **Export** wizard that deploys projects from its workspace into an existing TopBraid server. In TBC-ME, select a project (in a Project Explorer or Navigator view), and then either right-click the project or use **File** and select **Export... > TopBraid Composer > Deploy Project to TopBraid Live Server**.

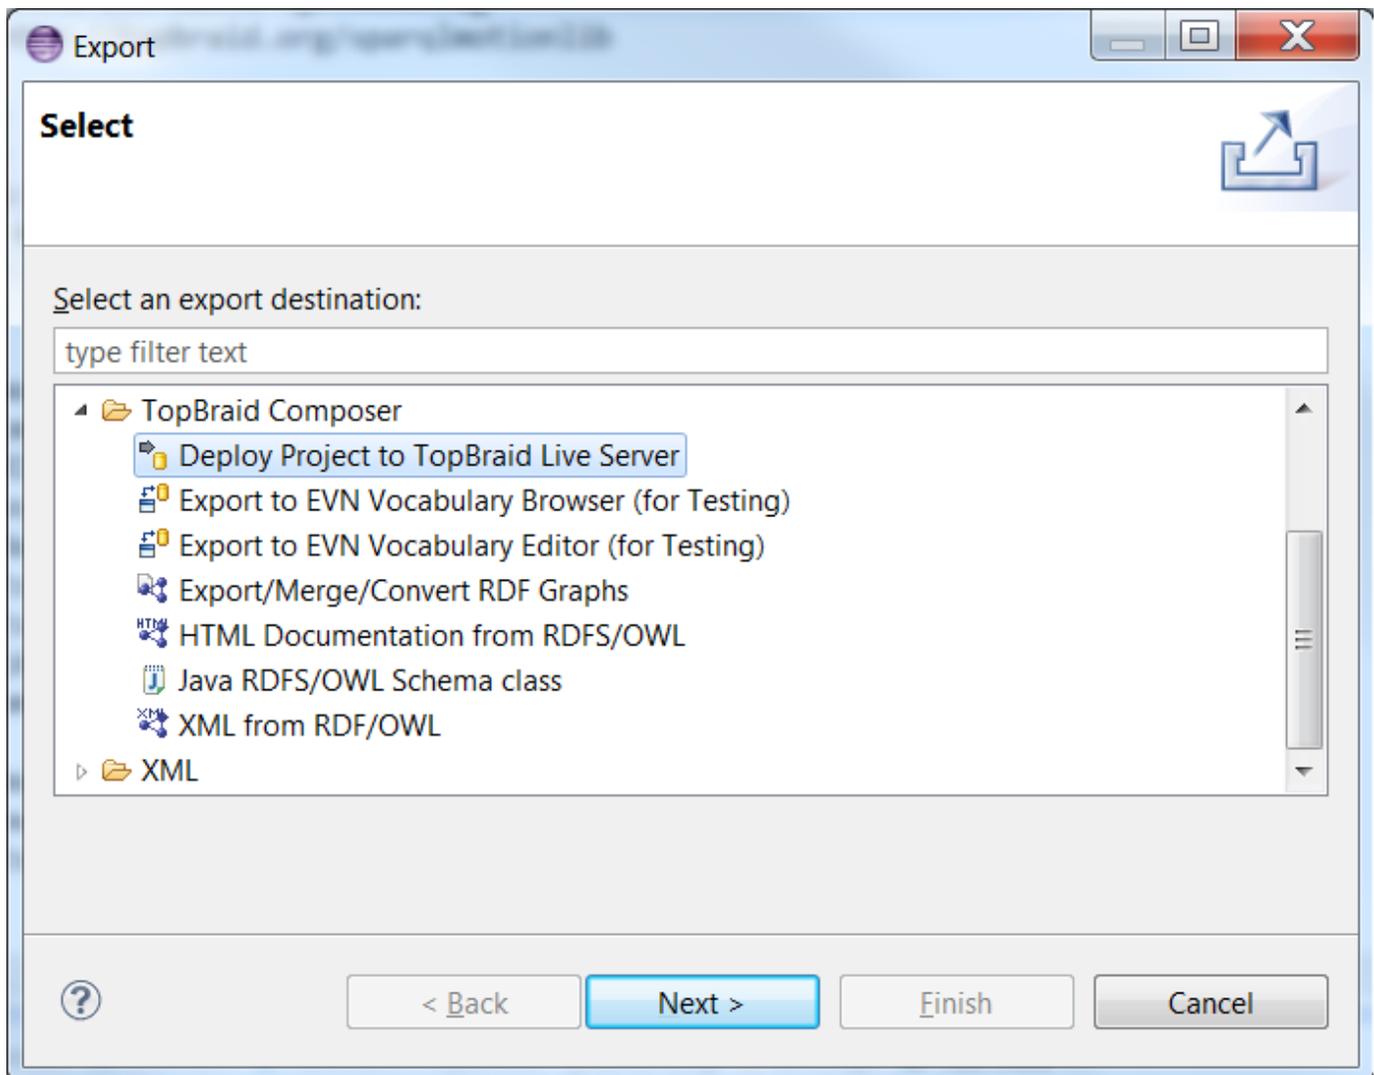

Click next in this wizard:

Deploy Project to TopBraid Live Server

Server URL:

User name:

Password:

Overwrite existing project with the same name

Send necessary connection credentials

NOTE: This should only be used with projects that contain TTL files. If used with a repositories project checking the *Overwrite existing project with the same name* box will clear the database of triples before uploading. Please zip the project and use the Project Upload feature inside TBL instead.

If necessary to send RDBMS files you will need to check the *Send necessary connection credentials* checkbox (to include the database credentials of the RDBMS connection in secured storage). Checking *Overwrite existing project with the same credentials* will replace the destination files and database content with the source files/data and is meant to be used mainly for .ttl files. Clicking **Finish** will zip up the entire selected project with all the RDBMS connection files, and other project files, and send it to the server specified in the 'Server URL'. And it will unzip it at the destination server in the workspace directory.

Upload Project to Server

Users can click the 'Project Upload' link from the admin page.

localhost:8080/evn/tbl/admin/projectUpload

Apps SSL certificate New Tab Epim TQ work related OpenVPN Conn... Other bookmarks

TopBraid
Enterprise Vocabulary Net™
TopBraid Enterprise Vocabulary Net version 4.5.0.v20140801-2111B User: Administrator (logout)

TopBraid Enterprise Vocabulary Net — Project Upload

Zip of project No file chosen

If project already exists in workspace:

Do not upload Delete old project Update old project

Notes:

1. Zip must contain one folder, which is the project, and this must contain a .project file specifying the same project name.
2. If the project contains connection files (such as .sdb) please upload the project directly from TopBraid Composer.

© Copyright TopQuadrant, Inc., All Rights Reserved [Send Error Log to TQ](#) [Support](#)

First create a zip file for the project folder (including the .project file) in your system. And click the 'Choose file' button to select such zip file. It should upload the zip file into the server, and unzip it properly in its workspace directory. This method will not create any database credentials in the server.

Send Projects between Servers

TBL administrators can send projects from one TBL server to another one, e.g., from a test server to a production server. From the Admin page, select **Server Administration > Send Projects to Another Server**.

TopBraid EDC
Enterprise Data Governance

Send Projects to Another Server

Target Server

Server URL

User name

Password

Projects to Send

Repositories

Options

Also send database triples

Clear the target project of triples before sending triples

Also send UI configurations (including forms) from http://server.topbraidlive.org/dynamic/uiconfig

Select the list of projects to send, and also check the box whether you want to send the database triples also to the destination server. It essentially zip up the entire project from the source server and unzip it at the destination server workspace. And also create the appropriate triples for all the graphs involved at the destination server. This essentially will eliminate the steps in copying database information from one test server to the production server. And all the imported vocabulary are sent properly also. This functionality should create the vocabulary and its import properly at the destination server.

Appendix: Web Services For Deployment

We also provide REST web service to perform HTTP requests for the following tasks if you have such needs to do so. You can perform the following using simple HTTP requests.

The following tables show the exact HTTP requests and parameters required to perform the specified tasks. The **bold** words are required system keyword, whereas the *italics* words (e.g. *xxx*) should be replaced with your specific details.

- **To create a new TBL Asset Collection**, use the `createProjectService` by specifying a new asset collection name and new asset collection name space.

Send this http request to the destination server

Http request	GET request
Path	tbl/tbl/swp
Parameters:	
_viewClass	http://topbraid.org/teamwork#CreateProjectService
_snippet	true
projectType	http://tbl.topbraidlive.org/tblprojects#ProjectType
owlImports	http://www.w3.org/2004/02/skos/core
spinImports	http://topbraid.org/spin/tblconstraints
name	<i>\$(newVocabName)</i>
defaultNamespace	<i>\$(newVocabNameSpace)</i>

- **To load rdf file into the asset collection** Use `importRDFFileService` to load a `.ttl` file into an existing asset collection.

send this http request to the destination server

Http request	POST request
Path	tbl/tbl/swp
Parameters:(use Multipart-form data)	
_viewClass	http://topbraid.org/teamwork#ImportRDFFileService
_base	urn:x-evt-master:\$(vocabName)
projectGraph	urn:x-evt-master:\$(vocabName)
format	turtle
record	true
file	<i>\$(RDFFileName)</i> (should be the absolute path to that <code>ttl</code> file e.g. <code>C:\Users\user1\Downloads\DBpediaCountryCapitals.sms.ttl</code> , mime-type is application/octet-stream)

- **To deploy a project** Use `unzipProject` service to deploy an entire project (in `.zip` file) to a destination server. This is the behavior in EDG UI "Send Projects to another server".

create a zip file of the directory of the project first, and send this http request to the destination server

Http request	POST request
Path	tbl/tbl/unzipProject
Parameters: (use Multipart-form data)	
old_project	update
projectName	<i>\$(ProjectName)</i>
project	<i>\$(ProjectName.zip)</i> (the absolute path to that zip file location.

- **To delete a project** Use `deleteProject` service to delete an entire project in the server.

Http request	POST request
Path	tbl/tbl/deleteProject
Parameters:	
appName	<i>\$(project name)</i>
delName	project